


SPECIFICATION

BARMATE
ALUMINIUM 50 **BARMATE**
ALUMINIUM 65

A	OVERALL WIDTH	800 mm	800 mm
B	STACK*	50 mm*	65 mm*
C	REACH	-35 mm	-35 mm
D	UPSWEEP	6°	6°
E	BACKSWEEP	9°	9°
F	STEM CLAMPING WIDTH	max 85 mm	max 85 mm
G	CLAMPING LENGTH	220 mm	220 mm
STEM CLAMPING DIAMETER		35 mm	35 mm
STEM CLAMPING TORQUE		max 6 Nm	max 6 Nm
CONTROLS CLAMPING TORQUE		max 4 Nm	max 4 Nm
WEIGHT		325g +/- 2%	325g +/- 2%
MATERIAL		AL 7050 series - custom heat treated	

*Other handlebar manufacturers specify "rise".
See what measure "rise" typically is in the drawing. We don't specify rise but use stack instead. For a rough comparison with other bars, see following table:

	STACK	approx. "RISE"
BARMATE 50	50 mm	15-25 mm
BARMATE 65	65 mm	30-40 mm

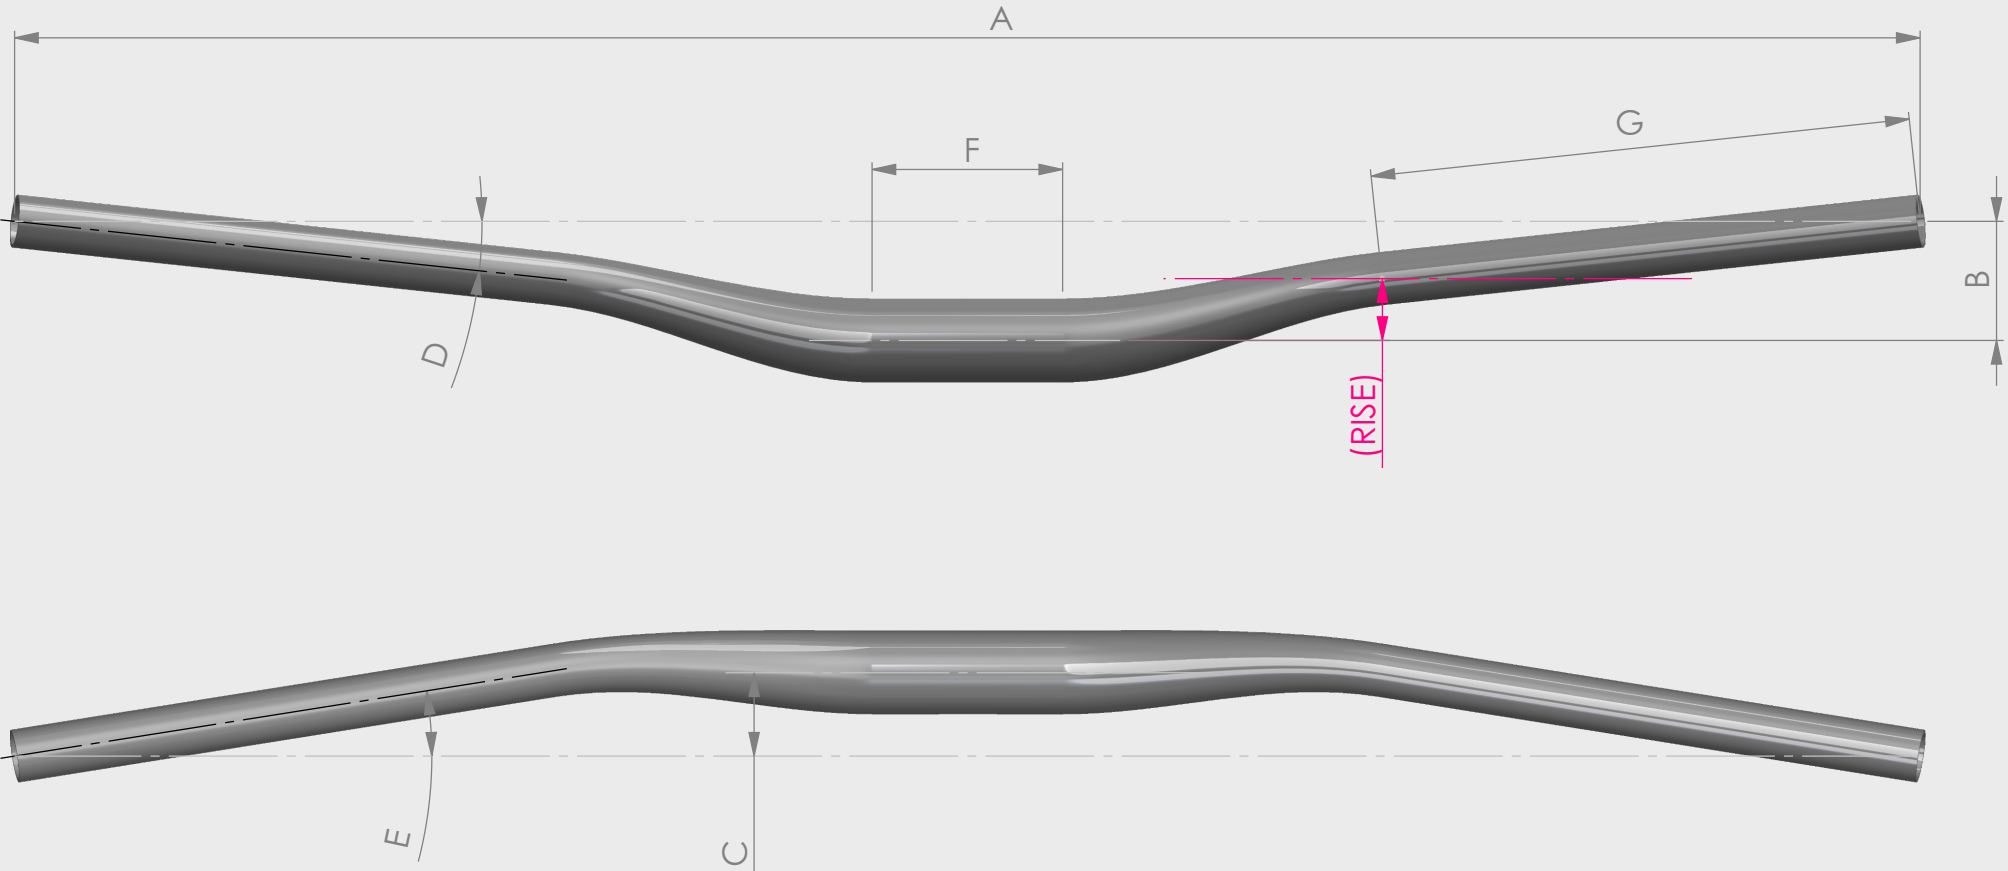

BARMATE ALUMINIUM

